

TAYLOR[®]

ToolsChefsTrust

2011-2012



Professional Products

Food Service & Test Instruments

The Taylor[®] Advantage

Best Quality.

Precision measurement has been the exclusive focus of our business for 150 years. Our ability to fulfill the professional market's exacting standards for accuracy, durability, and design is built on a legacy of technical expertise, quality materials and a constant awareness of changing industry needs.

Best Selection.

The diversity of our product line reflects an ongoing commitment to provide the best solutions to the food service and professional community at every level... with ever-expanding choices in specialized temperature and weight measurement instruments that promote food safety, enhanced productivity and user convenience.

One Source.

We're the Food Service and Professional industry's most complete source for both thermometers and scales. So to simplify your purchasing process, plus improve your choices, quality and value...take advantage of The Taylor Advantage. We've got everything you need.



Table of Contents

1" Standard Grade Dial Instant Read Thermometers.....	Page 3
1" Superior Grade Dial Instant Read Thermometers	Page 3
2" Superior Grade Dial Bi-Therm [®] Thermometers.....	Page 4
1 3/4" Superior Grade Dial Bi-Therm [®] Thermometers	Page 4
TempTaker [™]	Page 4
Hand Held Thermocouple Thermometers	Page 5
K-Type Probes for Thermocouple Thermometers	Page 6
Infrared Thermometers	Page 7
Pocket Digital Thermometers	Page 8
Roast/Meat Thermometers	Page 9
Cooking Thermometers	Page 10
Professional Kettle Thermometers	Page 10
Candy & Deep-Fry Thermometers	Page 11
Oven/Grill Thermometers	Page 12
Refrigerator/Freezer Thermometers	Page 13
HACCP Food Safety Items	Page 14-15
Special Use Thermometers/Strips	Page 16
Panel Mount Digital Thermometer	Page 17
TruTemp [®] Thermometers	Page 17-18
Large Dial Thermometers/Clocks	Page 18
Window/Wall Thermometers.....	Page 19
Max/Min Thermometers	Page 20
Maximum Registering Thermometers.....	Page 20
Pocket Case Thermometers	Page 21
Timers	Page 22
Electronic Portion Control Scales – Stainless Steel Platform.....	Page 23
Analog Portion Control Scales – Stainless Steel Chassis	Page 24
Heavy Duty Mechanical Scales	Page 24
Compact Analog Portion Control Scales	Page 25
Receiving Scales.....	Page 25
Hanging Scales	Page 25
Salter [®] for Foodservice	Page 26
Hotel & Resort Products	Page 27
Accessories.....	Page 28
Replacement Parts for Model 9405	Page 28
Miscellaneous Parts and Supplies	Page 28
Index of Products by Name.....	Page 29-32
Company Terms & Conditions	Page 33

Taylor[®] Takes Temperature Seriously

A failure in your food safety practices can put you out of business and a Hazard Analysis Critical Control Point (HACCP) program is the best way to protect your business from this risk. This program takes a look at how food is handled from truck to table, and the temperature safety standards that are defined by the USDA. With more than 150 years of expertise in product development and manufacturing,

Taylor's instruments are accurate and easy to use with minimal training, so even the newest crew member can use them reliably in a HACCP program. This catalog contains some of Taylor's products for food service use. If you would like to learn more, or if you have any questions about HACCP or food safety temperature standards, just ask your Taylor representative, or give us a call at 1.800.225.4834.

Instant Read Dial Thermometers

1" Standard Grade



- 5" stems
- Recalibratable
- Accuracy +/- 2° at dial midpoint
- Patented recalibration wrench built into pocket tube
- Shatterproof Lexan® plastic lens
- High visibility dial graphics
- Convenient, protective case
- Durable, stainless steel
- Superior shock protection
- Individual cartons with hang tabs (except 3621N, 5988J, 5989N, & 5989-44)



Exclusive Safe-T-Set Calibration System

All 1" models have a protective pocket case which doubles as a calibration tool.

3621N
0/220°F anti-microbial case. Blister Card.

5988J
50/550°F. Blister Card.

5989N
0°/220°F. Blister Card. NSF listed.

5989-44 International Series
-14°C to 105°C.
0° to 220°F. NSF listed.

6091N
-40°/120°F, standard grade, 1 point calibration. NSF listed.

6092N
0°/220°F. GloTherm. NSF listed.

6093N
50°/550°F.

6094N
-40°/150°C.

6095N
25°/125°F.

6096N
-40°/160°F. GloTherm.

6099N
-10°/110°C.



1" Superior Grade Dial Instant Read Thermometers

- 5" stems
- Recalibratable
- Accuracy +/- 2°F/1°C of entire range
- 3 point calibration
- Patented recalibration wrench built into pocket tube
- Shatterproof Lexan® plastic lens
- High visibility dial graphics
- Convenient, protective case
- Durable, stainless steel
- Superior shock protection
- Individual cartons with hang tabs

6071J **6076J**
-40°/120°F. -40°/160°F.

6072N **6079J**
0°/220°F. -10°/110°C.

6073J
50°/550°F.

6075N
25°/125°F.

2" Superior Grade Dial Bi-Therm® Thermometers

- 8" stems
- Recalibratable
- 3 point calibration
- Accuracy +/- 2° of entire range
- "Human-engineered" dial graphics
- Stainless steel external parts
- Extended scale design
- Packed in individual boxes



6211J -40°/120°F.	6212J 25°/125°F.	6213J -40°/160°F.	6215J 0°/220°F.	6220J 0°/550°F.	6235J -10°/110°C, 1°C divisions.
-----------------------------	----------------------------	-----------------------------	---------------------------	---------------------------	---

1 3/4" Superior Grade Dial Bi-Therm® Thermometers

- 8" stems
- Recalibratable
- Accuracy +/- 2° of entire range
- 3 point calibration
- High visibility dial graphics
- Anti-parallax dial/case design
- Stainless steel external parts
- Extended scale design
- Superior shock protection
- Packed in individual boxes (except 8215N)



8212J 25°/125°F.	8215N 0°/220°F -10°/110°C Blister Carded. Vessel clip included. NSF Listed.	8220J 50°/550°F.	8238J 0°/250°C, 2°C divisions.
----------------------------	--	----------------------------	---

Temp-Taker™

9829

Temp-Taker™ HACCP Food Safety Solution is an automated temperature recording data logger with pre-programmed HACCP Menu Plan and HACCP Control Points. Temp-Taker consists of: Temp-Taker Type K Recording Thermocouple; Type K food insertion probe with 1.50mm diameter tip; Temp Taker Software CD; USB Cable and AC adapter; Safe-T-Guard sanitizing tube. 3AAA batteries included. NSF listed.



Hand Held Thermocouple Thermometers



9200 (Meter Only)
Thermocouple thermometer. -58° to 1999°F/-50° to 1300°C. +/- 2 °F/+/-1°C. Field recalibratable. Max temperature feature. Hold feature. 9V battery included.



9405
High accuracy waterproof K type thermocouple thermometer with 2-second response probe on 4 ft. cord. +/- 1° over HACCP range, recalibratable by front panel switches, auto-off feature, range -40°/500°F or 40°/260°C. NSF listed.



9810 (Meter Only)
Type K thermocouple thermometer, accuracy +/- 2°F. Temperature range -58°/2498°F, -50°/1370°C. Field recalibration, Auto Off, Min/Max and Hold Feature. Includes vinyl case and 9 volt battery.

9810-17 (As Shown)
9810 meter and 9817 probe.

9810-18
9810 meter and 9818 with 1.5 probe diameter.

9867FDA
Digital folding probe thermometer. 1.5mm probe diameter complies with FDA recommendations. Range: -40°F/572°F and -40°C/300°C. Accuracy: +/- 2°F in range 14°-212°F; +/- 3.6°F above and below. Speed: stabilized reading in 5 seconds or less. Antimicrobial case. Recalibration system. 2 AAA batteries included. NSF listed.



9201
K type thermocouple with elastomer boot and 9817 step-down probe.



9522
Infrared Thermometer with Thermocouple Outlet. Infrared temperature range: -76 to 932°F or -60 to 500°C. Thermocouple temperature range: -83 to 1999°F or -64 to 1400°C. Backlit LCD readout for easier reading. White Light Targeting LED. Distance: Spot:12:1; Thermocouple outlet compatible with Type K probes. Includes 2 AAA batteries and nylon case. Probe sold separately.



9306N
HACCP pass/fail light system. Min, Max and Lock features. Adjustable Emissivity. D:S = 3:1. Thermocouple range: -67°F to 626°F / -55°C to 330°C. Infrared range: -67°F to 482°F / -55°C to 250°C. Thermocouple accuracy in -14°F to 149°F (-10° to 65°C) +/- 1°F (0.6°C). Infrared accuracy in 32°F to 149°F (0°C to 65°C) +/- 2°F (1°C). Resolution 0.5°F or 0.2°C. Auto shut off. 2 AAA batteries included.




9828
Thermo Check HACCP Temperature Recording System with Type K Waterproof Recording Thermocouple. Type K food insertion probe. Protective rubber boot. Thermo Check Software on CD ROM. AC power adapter and rechargeable batteries (included).




9815A
Thermocouple Data Logger for use with any type K probe. It uses RS232 interface to a PC -328°F/2498°F, -200°C /200°C. Accuracy +/- 2°F; +/-1°C. Includes software.

K-Type Probes for Thermocouple Thermometers

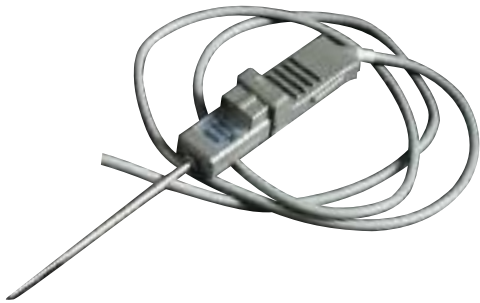

9405RP
1.575mm tip diameter probe.

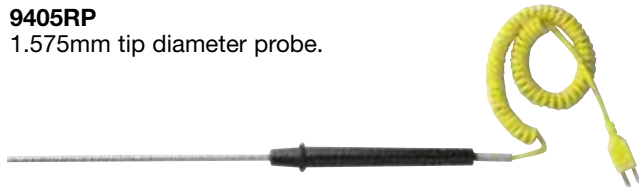

9803
7" blunt tip probe with 5' lead.



9810-1
Hamburger/filet probe 1/8" tip with 5' lead.

9810-2
Hamburger/filet probe; 3/16" tip with 5' lead.




9801
Non-mineral filled replacement sharp tip short probe.




9806
Clip-on oven probe with 4' lead.



9812
Angle surface probe with 5' lead.

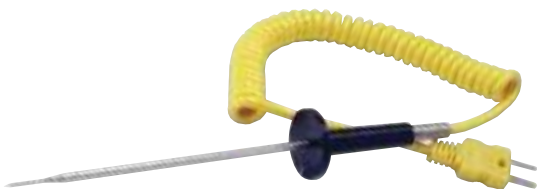

9817
Step down penetration probe with 1.575mm tip diameter and 3' lead.

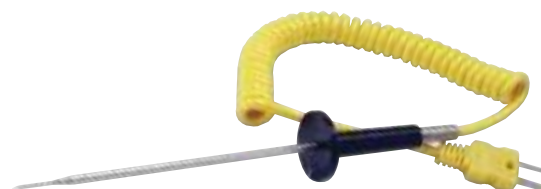

9818
Step down penetration probe with 1.50mm tip diameter and 3' lead.



9826
Needle tip probe.

Infrared Thermometers for Safe Non-Contact Temperature Measurement



9305
Dual temp combination, infrared and thermocouple thermometer, min/max and hold features. Infrared range: -27°F/428°F or -33°C/220°C. Probe range: -67°F/630°F or -55°C/330°C. CR2032 lithium battery included. Call for availability.



9306N
Splash-proof Dual Temp Infrared Thermometer with Fold Out Thermocouple Step Down Probe. HACCP pass/fail light system. Min, Max and Lock features. Adjustable Emissivity. D:S = 3:1. Thermocouple range: -67°F to 626°F / -55°C to 330°C. Infrared range: -67°F to 482°F / -55°C to 250°C. Thermocouple accuracy in -14°F to 149°F (-10° to 65°C) +/-1°F (0,6°C). Infrared accuracy in 32°F to 149°F (0°C to 65°C) +/- 2°F (1°C). Resolution 0.5°F or 0.2°C. Auto shut off. 2 AAA batteries included.



9517L
Infrared Thermometer with Laser. Temperature range -67°F to 662°F or -55°C to 350°C. Laser sight. HACCP warning light system, °F & °C selectable. Max/Min and Hold Features. Accuracy +/- 1.8°F; +/- 1.0°C in HACCP temperature ranges. Distance: Spot 6:1. Adjustable emissivity. Auto-off, low battery indicator. Includes 2 AAA batteries and nylon case.



9521
Infrared Thermometer with Laser. Temperature range -50°F to 750°F or -50°C to 400°C. Accuracy +/- 1.8°F; +/- 1.0°C. °F&°C selectable. Laser sight and LED white light for better targeting. Backlit LCD readout for easier reading. Includes 2 AAA batteries and nylon case. Call for availability.



9522
Infrared Thermometer with Thermocouple Outlet. Infrared temperature range: -76 to 932°F or -60 to 500°C. Thermocouple temperature range: -83 to 1999°F or -64 to 1400°C. Backlit LCD readout for easier reading. White Light Targeting LED. Distance: Spot:12:1; Thermocouple outlet compatible with Type K probes. Includes 2 AAA batteries and nylon case.
Probe sold separately.



9523
Infrared Thermometer. Temperature range: -49°F to 750°F / -45°C to 399°C. D:S = 6:1. Scan and Hold Feature. Emissivity fixed @ 0.95 and Resolution at 0.1°F/0.1°C. 2 AAA batteries included.



9524
Temperature Range: -4°F to 605°F or -20°/320C; Laser sight; Scan and Hold Feature and F&C Selectable; Accuracy: +/-2F; +/-1C; Distance: Spot 8:1. Emissivity Range: Fixed 0.95; 9 volt battery included. Call for availability.

Pocket Digital Thermometers



9840RB
Digital Thermometer with protective rubber boot to withstand up to 10 foot drops. Stainless stepdown probe. -40°F/302°F / -40°C/150°C; NSF Listed; Protective case and extra LR44 battery included. Auto-off feature.



9841RB
High Temp Digital Thermometer with protective rubber boot to withstand up to 10 foot drops. Stainless steel stepdown probe. -40°F/500°F; -40°C/260°C; NSF listed; Protective case and extra LR44 battery. Auto-off feature.



9842FDA
Waterproof digital thermometer. -40°/450°F and -40°/230°C. Auto-Off feature, recalibratable, F°/C° selectable. Antimicrobial sleeve and housing. LR44 battery included. NSF listed.



9847FDA
Waterproof digital thermometer. -40°/450°F and -40°/230°C. Auto-Off Feature, F°/C° selectable. Includes lanyard. Antimicrobial sleeve and housing. LR44 battery included. NSF listed.



9848EFDA
Dishwasher proof digital thermometer, -40/450°F and -40/230°C. Min/Max Registry, hold feature. Recalibratable. Antimicrobial sleeve and housing. CR2052 battery included. NSF listed.



9878E
High precision digital thermometer with min/max memory. Recalibratable, °F to °C switchable. Auto-off/disable auto-off feature. Range: -40°/500°F and -40°/260°C. Antimicrobial casing and snap fit sleeve. Backlight and dishwasher safe. 1 CR2032 lithium battery included. NSF listed.



3516
Digital Instant Read Thermometer. 0.3" LCD readout. Accurate from -40°F/302°F. On/Off button. Pocket case with clip. Extra LR44 battery included. NSF listed.



3519
Waterproof Digital Thermometer. Compact pen-style, large LCD readout. -40°/450°F and -40°/230°C. On/off and hold buttons. Auto shut off feature. LR44 battery included. NSF listed.



9836
Adjustable head, digital thermometer. Large 1 inch readout. Accurate from -40°F to 450°F and -40°C to 230°C. Storage sleeve. Durable stainless steel 5 inch stem with step down tip. Auto shut-off feature. LR44 battery included.

Roast/Meat Thermometers



3504
TruTemp® Meat Dial Thermometer. Easy-to-read 2" dial. Accurate from 120°/210°F. Roasting scale with USDA guidelines. Adjustable temperature indicator. Stainless steel 4 1/2" stem. NSF listed.



5937N
Classic Series Multi-Purpose Thermometer. Armored sabre-tipped tube. Easy-to-read dial face. Dishwasher safe. 105°/185°F.



5939N
Classic Series Meat Thermometer. Dishwasher safe. Easy-to-read 2 3/4" dial. 5 1/2" stem. Prep scale for various meats. 120°/212°F. NSF listed.



5947
Oven/Meat Dial Combination Thermometer. Monitor cooking & oven temperature at the same time. Oven temperature range 150°/500°F. Meat temperature range 120°/190°F. NSF listed.



5984J
Instant Read Oven Thermometer. 1 3/4" dial with 5" stem. 0°/220°F. +/- 1% accuracy. NSF listed.



5990N
5" Commercial Series Meat Thermometer. Easy-to-read 3" dial with prep scale for various meats. Spun stainless steel dial. 120°/212°F. NSF listed.



61054J
2" easy-to-read dial, 4" stainless steel stem. Glass crystal. 0°/220°F. Packed in individual carton.



6081J8
2" dial, 8" stainless steel stem for instant reading when inserting in meat/poultry. Shock proof. Recalibration hex nut. 100°/200°F. Packed in individual carton. NSF listed.

Cooking Thermometers

1479-21

Wireless Thermometer with Remote Pager plus Timer. 2 pre-alert signals and a completion signal – creates light, sound & vibration. 9 preset temperatures or customize to desired taste. Different tones for thermometer & timer. Transmits up to 200'. Times up to 39 hours, 59 minutes, 59 seconds. Backlight & clock features. Temperature range: 32° to 450°F (0° to 232°C) Auto off feature; volume on remote, 2 AAA batteries for base & 2 AAA batteries for remote included.



1479RP

Replacement probe for model 1479-21.



1470N

Classic Series Digital Thermometer and Timer. Stainless steel probe with 4 foot cord. Temperature alarm signals when food is done. Temperature range 32°/392°F and 0°/200°C. On/off switch to preserve battery life. Folds down for compact storage. Magnet on back for mounting to stove. Operates on 2 AAA batteries (included).

1470NRP

Replacement probe for model 1470N, 1478-21, 1471N.



1471N

Digital Oven thermometer with backlight. Simultaneous thermometer/timer operation. Temperature range 32°/392°F and 0°/200°C. Stainless steel probe with silicone covered cord. Preset taste levels; programmable temperature alarm; built in timer. Operates on 2AAA batteries (included).

1471RP

Replacement probe for model 1471 (not for use with 1471N).



1478-21

Digital Thermometer and Timer with Stainless Steel faceplate and probe. Temperature Range 32°/392°F and 0°/200°C. Alarm signals when food is done. 2 AAA batteries (included).



3518N

TruTemp® Series Digital Cooking Thermometer. Stainless steel probe with 4 foot silicone cord. Temperature range 32°/392°F and 0°/200°C. C/F switch. Stand or use with magnet on back or for mounting to stove. Operates on 1AAA battery (included).

Candy & Deep-Fry Thermometers



519
Digital Candy/Deep Fry Thermometer. Preset candy and deep fry temperatures. Unit beeps and flashes when desired preset temperature is approaching and then reached. Temperature range -40 to 450°F and -40 to 230°C. Lithium battery included.



3505
TruTemp® Series Candy-Deep Fry Thermometer. Easy-to-read 2" dial. Accurate from 100°/380°F. Adjustable pan clip and temperature indicator. 6" stem. NSF listed.




3522
TruTemp® Series Deep Fry Thermometer. Easy-to-read 2 1/2" dial. Durable extra long 12" stainless steel stem with adjustable pan clip. Movable temperature indicator for easy reference. Instant read 50°/550°F & 50°/285°C. NSF listed.



5909J
Deep-Fry Thermometer. 16 3/4" long with channeled, stainless steel back. Insulated wood handle. High magnification tube. Black numbers & scale lines for easy reading. 60°/450°F. Packed in individual carton.



5911N
Classic Series Candy-Deep Fry Thermometer. Large easy-to-read 2 3/4" dial. Accurate from 100°/400°F and 50°/200°C. Adjustable pan clip. Dishwasher safe. Durable 6" stainless steel stem. NSF listed.



5978N
Classic Series Candy-Deep Fry Thermometer. Glass tube with adjustable pan clip. 8" long. Accurate from 100°/400°F and 50°/200°C. Convenient cooking chart is printed on the protective storage sleeve.



5983N
Classic Series Candy-Deep Fry Thermometer. Large, easy-to-read temperature zones. Insulated handle with built-in pan clip. Durable stainless steel. 12" long. 100°/400°F and 50°/200°C.



5992N
5* Commercial Series Candy-Deep Fry Thermometer. Professional quality & accuracy. Deluxe, easy-to-read 3" spun stainless steel dial. Adjustable pan clip. Dishwasher safe with double 6" stainless steel stem. 100°/400°F. NSF listed.



9839-15
Adjustable head, digital Candy - Deep Fry Thermometer. Multi-position pivoting head. Large 1 inch readout. Accurate from -40°F to 450°F and -40°C to 230°C. Adjustable pan clip. Durable stainless steel 9 inch stem. Auto shut-off feature. LR44 battery included.



6084J8
Professional Candy-Deep-Fry Thermometer. 2" dial. 8" stem. 50°/550°F.

6084J12
Professional Candy-Deep-Fry Thermometer. 2" dial. 12" stem. 50°/550°F.

Professional Kettle Thermometer



6087J12
Easy-to-read 2" dial. Professional kettle thermometer with 12" durable stainless steel stem. Plastic case insulates and protects dial. 50°/550°F. Packed in individual carton.

Oven/Grill Thermometers



3506
TruTemp® Series Oven Dial Thermometer. Easy-to-read 2 1/2" dial. Durable stainless steel. Hangs or stands. Accurate from 100°/600°F and 50°/300°C. NSF listed.



5921N
5* Commercial Series Oven Guide Thermometer. Easy-to-read zone guide references. Durable stainless steel. Hangs or stands. Dishwasher safe. Accurate from 100°/600°F.



5932
Classic Series Oven Dial Thermometer. Easy-to-read 3 1/4" dial. Durable stainless steel. Hangs or stands. Accurate from 100°/600°F and 50°/300°C. NSF listed.



5980N
Professional Hot Holding Thermometer with HACCP guide lines. 100°/180°F and 38°/84°C. Blister card. NSF listed.



5984J
Instant Read Oven Thermometer. 1 3/4" dial with 5" stem. 0°/220°F. +/- 1% accuracy. NSF listed.



5995N
5* Commercial Series Oven Thermometer. Large, easy-to-read 3" dial. Deluxe two-way hanger/stand for more secure placement on oven racks. 200°/500°F. NSF listed.



6021
Grill Surface Thermometer. Easy to read 2" dial. Temp range: 100°F to 700°F. Detachable wire for ease in handling. Enclosed design protects coil from surface dirt & grease. Durable stainless steel construction. NSF listed.



814
Grill/Smoker Thermometer Temperature range 100° to 500°F, smoke & BBQ range indicators. Dial features a luminescent background making it easy to read in the dark. 2 3/4" oversized dial, heavy duty stainless steel construction, 1.88" stem. Base of thermometer can be mounted into smoker wall for accurate readings.



6246J
CharBroiler Thermometer. 200°/1000°F. Hermetically sealed. Holder for use on the grill.

Refrigerator/Freezer Thermometers



1442
Critical Care Thermometer for Monitoring Temperature Critical Materials. Temperature Range: -40°/392°F and -40°/200°C. Accuracy: 20°/212°F +/- 1.8°F. Programmable high and low limit alarms. 96 hour memory of high and low temperatures. Records a history of alarm breaches including time and duration. Dual 6' glycol-tolerant probes. Password protected. 2 AAA batteries included.



1446
Wireless Refrigeration Thermometer with Remote Sensors. Temperature range -22°/104°F or -30°/40°C. Two remote sensors transmit reading to display unit. Visual and audible alarms based on user set min and max temperatures. Transmission range up to 65 feet from display unit. Audible and visual alarm with 15 minute delay. 2 AAA batteries for base unit and 4 AA batteries for sensors not included.



NEW!

1443
Digital Ref/Freezer Thermometer. Compact Size hangs or stands. Bold LCD Readout. -4° to 140°F/-20° to 60°C. Includes 1 CR2025 battery.



3503
Refrigerator/Freezer Thermometer. Easy-to-read face, -20°F/60°F and -30°/30°C temperature range. Clips, hangs or attaches with suction cups. Safe temperature zone indicators. NSF listed.



3507
TruTemp® Series Refrigerator/Freezer Thermometer. Large 2 1/4" dial. Durable stainless steel. Hangs or stands. Accurate from -20°/80°F and -30°/30°C. Safe temperature zone indicators. NSF listed.



3509
TruTemp® Refrigerator/Freezer Thermometer. Compact size clips to rack or attaches with suction cup. Accurate from -20°/80°F and -0°/30°C. Safe temperature zone indicators. NSF listed.



5924
Classic Series Refrigerator/Freezer Thermometer. Extra large, colorful 3 1/4" dial. Durable stainless steel. Hangs or stands. Accurate from -20°/80°F and -30°/30°C. Safe temperature zone indicators. NSF listed.




5925N
Classic Series Refrigerator/Freezer Thermometer. Magnified, easy-to-read face. Shatterproof plastic lens protects glass tube filled with non-toxic liquid. Hangs or stands. Accurate from -20°/80°F and -30°/30°C. Safe temperature zone indicators. NSF listed.

5925-44 International Series Refrigerator/Freezer Therm. Same as 5925N with Celsius dominant scale. Trilingual packaging. NSF listed.



5926
Economy hanging Refrigerator/Freezer Thermometer. -40° to 120°F and -40° to 90°C. Bulk pack of 50 per box.



5977N
Classic Series Refrigerator/Freezer Thermometer. Easy-to-read face. Safe temperature zone indicators. Hangs or stands. -10°/60°F.



5981N
Professional Cold Holding Thermometer with HACCP Guidelines. -20°/80°F and -34°/20°C. NSF listed.



5982N
Classic Series Milk/Beverage Thermometer. -40°/120°F and -30°/50°C. Includes adhesive and magnetic backing.



5996N
5* Commercial Series Refrigerator/Freezer Thermometer. Professional quality & accuracy. Easy-to-read 3" dial with safe temperature zone guide. Durable stainless steel. Hangs or stands. -30°/70°F. NSF listed.



6129J10
Showcase Thermometer. Red Permacolor™ liquid filled for easy reading in poor light. Clear plastic protective case. Mounting clamps on each end. -40°/120°F.



5927
Glycol Refrigerator/Freezer Thermometer. Propylene Glycol stimulates food product temperatures for a more accurate reading. Not affected by ambient air changes due to door openings or cold and warm spots. Reduces energy cost by mimicking food temperatures. -20°F/60° and -30°C/15°C. Hangs/stands/sits.

NEW!

HACCP Food Safety Items




3621N
0°/220°F, superior grade, 3 point calibration with antimicrobial case. NSF listed.



5980N
Professional Hot Holding Thermometer with HACCP Guidelines. 100°/180°F and 38°/84°C. NSF listed.



5981N
Professional Cold Holding Thermometer with HACCP Guidelines. -20°/80°F and -34°/20°C. NSF listed.

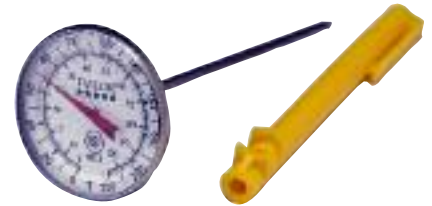

8018N
HACCP Pocket Test Thermometer, 5" stem, 1 3/4" dial, 0°/220°F, standard grade, 1 point calibration, antimicrobial sleeve. NSF listed.



TempRite® Test Strips
TempRite® Dishwasher Temperature Test Strips. Waterproof. One time use. Accuracy +/- 2°F. 1 pack of 25 strips.
8766J 160°F.
8767J 180°F.
8768J 140°F/40°C.



TempRite® Test Labels
TempRite® Adhesive Dishwasher Temperature Test Labels. Waterproof. One time use. Accuracy +/- 2°F. 1 pack of 24 labels.
8750 180°F/82°C.
8751 160°F/72°C.
8769 160°F/72°C; 170°F/77°C and 180°F/82°C.



9000 Series
DocuTemp Wireless Real Time Temperature Monitoring System. Provides user with continuous monitoring and complete management reporting of temperature and humidity conditions. Meets or exceeds HACCP requirements for temperature monitoring. Simple and easy to install. *Please contact customer service for available systems and accessories.*



9306N
HACCP pass/fail light system. Min, Max and Lock features. Adjustable Emissivity. D:S = 3:1. Thermocouple range: -67°F to 626°F / -55°C to 330°C. Infrared range: -67°F to 482°F / -55°C to 250°C. Thermocouple accuracy in -14°F to 149°F (-10° to 65°C) +/- 1°F (0.6°C). Infrared accuracy in 32°F to 149°F (0°C to 65°C) +/- 2°F (1°C). Resolution 0.5°F or 0.2°C. Auto shut off. 2 AAA batteries included.



9405
High accuracy waterproof K type thermocouple thermometer with 2-second response probe. +/- 1° over HACCP range, recalibratable by front panel switches. -40°/500°F and 40°/260°C. 9V battery included.



9517L
Waterproof Infrared Thermometer with HACCP pass/fail light system; -67°F/572°F and -55°C/300°C +/- 1°F; +/- 0.6°C, D:S 2.5:1; Adjustable Emissivity; Min, Max, Lock; Response Time: 1 Second; Resolution: 0.1°F/0.1°C. 2 AAA batteries not included.



9523
Infrared Thermometer. Temperature range: -49°F to 750°F / -45°C to 399°C. D:S = 6:1. Scan and Hold Feature. Emissivity fixed @ 0.95 and Resolution at 0.1°F/0.1°C. 2 AAA batteries included.



9810-17
9810 meter and 9817 probe. Includes step down fast response probe with 5' lead.

9810-18
9810 meter and 9818 with 1.5 probe diameter.



9815A
Thermocouple Data Logger for use with any type K probe. It uses RS232 interface to a PC -328°F/2498°F and -200°C/1370°C. Accuracy +/- 2°F; +/- 1°C. Includes software. 9V battery included.



9829
Temp-Taker™ HACCP Food Safety Solution is an automated temperature recording data logger with pre-programmed HACCP Menu Plan and HACCP Control Points. Temp-Taker consists of: Temp-Taker Type K Recording Thermocouple; Type K food insertion probe with 1.5mm diameter tip; Temp Taker Software CD; USB Cable and AC adapter; Safe-T-Guard sanitizing tube. NSF listed.



9842FDA
Waterproof digital thermometer. -40°/450°F and -40°/230°C. Auto-Off feature, recalibratable, F°/C° selectable. Antimicrobial sleeve and housing. Battery included. NSF listed.



9847FDA
Waterproof digital thermometer. 1.5mm step down probe. -40°/450°F and -40°/230°C. Auto-Off and Hold Feature. F°/C° selectable. Includes lanyard. Antimicrobial sleeve and housing. NSF listed. Battery included.



9848EFDA
Dishwasher proof digital thermometer. -40/450°F and -40/230°C. 1.5mm step down probe. Min/Max Registry, hold feature. Recalibratable. Antimicrobial sleeve and housing. CR2032 Battery included. NSF listed.



NEW!

9867FDA
Digital folding probe thermometer. 1.5mm probe diameter complies with FDA recommendations. Range: -40°F/572°F and -40°C/300°C. Accuracy: +/- 2°F in range 14°-212°F; +/- 3.6°F above and below. Speed: stabilized reading in 5 seconds or less. Antimicrobial case. Recalibration system. 2 AAA batteries included. NSF listed.



NEW!

9878E
High precision digital thermometer with min/max memory. Recalibratable, °F to °C switchable. Auto-off/disable auto-off feature. Range: -40°/500°F and -40°/260°C. Antimicrobial casing and snap fit sleeve. Backlight and dishwasher safe. CR2032 battery included. NSF listed.



9997C
Safe-T-Guard Sanitizing System in bulk pack of 8 tubes per box. Screw-on top, sealed tube to prevent leaking.



9998C
Safe-T-Guard Sanitizing System with model 3621N antimicrobial thermometer. Screw-on top, sealed tube to prevent leaking.



9999N
HACCP Probe Wipes. 70% Isopropyl Alcohol. 10 boxes per case. 100 single use wipes per box.



Special Use Thermometers / Strips



5408J
-40°/130°F&C, ring top, stainless steel case. Permacolor™ filled.



5410J
-40°/130° and -40°/55°C, F&C, cup case, ring top, stainless steel case, Permacolor™ filled.



5416J
-40°/130° and -40°/55°C, F&C cup case, ring top, brass case, Permacolor filled.



5948N
Tobacco Thermometer. 10°/200°F and -10°/90°C

5408A
Replacement tube for 5408J.



5976N
Soil Thermometer. 20°/180°F and 0°/80°C.



5985N
Hot Beverage Thermometer. 0°/220°F. 1" dial. 5" stem. Includes pan clip and sleeve with built-in calibration wrench. NSF listed.



5997E
Cappuccino Frothing Thermometer. Easy-to-read zoned dial for optimum frothing temperatures. Sealed dial design to prevent fogging. 120°/180°F.



8750
180°F/82°C TempRite® Adhesive Dishwasher Temperature Test Labels. Waterproof. One time use. Accuracy +/- 2°F. 1 pack of 24 labels.



8766J
160°F/71°C TempRite® Dishwasher Temperature Test Strips. 1 pack of 25 strips.

8767J
180°F/82°C TempRite® Dishwasher Temperature Test Strips. 1 pack of 25 strips.

8768J
140°F/40°C TempRite® Dishwasher Temperature Test Strips. 1 pack of 25 strips.



8215
1 3/4" Bi-Thermometer. 8" stems. Recalibratable. Range: 0°/220°F and -10°/110°C. Accuracy +/-2° of entire range. Blister Carded. Vessel clip included. NSF Listed.



8769
160°F/71°C; 170°F/77°C; 180°F/82°C TempRite® 3 in 1 Adhesive Dishwasher Temperature Test Labels. 1 pack of 24 labels.



21412-1J
DELFIN® Plastic non-refillable with pocket case, -50°/120°F. Permacolor™ filled.

21420-1J
DELFIN® Plastic non-refillable with pocket case, 0°/220°F. Permacolor™ filled.



21462-1J
Dishwasher test thermometer. Mercury filled. Tube sealed in open face armor case made of high-temperature MINLON® plastic. Maximum registering. 0°/220°F. Individually packaged.



Panel Mount Digital Thermometer

9940N

Flush and flange mounting options. -40°/300°F and -40°/150°C. Waterproof housing and probe. 10' cable for both air and liquid immersion. Operates on 1 AAA battery (included).

TruTemp® Thermometers



3503
Refrigerator/Freezer Thermometer. Easy-to-read face, -20°/60°F and -30°/30°C temperature range. Clips, hangs or attaches with suction cups. Safe temperature zone indicators. NSF listed.



3504
Meat Dial Thermometer. Easy-to-read 2" dial. Accurate from 120°/210°F. Roasting scale with USDA guidelines. Adjustable temperature indicator. Stainless steel 4 1/2" stem. NSF listed.



3505
Candy-Deep Fry Thermometer. Easy-to-read 2" dial. Accurate from 100°/380°F. Adjustable pan clip and temperature indicator. 6" stem. NSF listed.



3506
Oven Dial Thermometer. Easy-to-read 2 1/2" dial. Durable stainless steel. Hangs or stands. Accurate from 100°/600°F and 50°/300°C. NSF listed.



3507
Refrigerator/Freezer Thermometer. Large 2 1/2" dial. Durable stainless steel. Hangs or stands. Accurate from -20°/80°F and -20°/20°C. Safe temperature zone indicators. NSF listed.



3509
Refrigerator/Freezer Thermometer. Compact size clips to rack or attaches with suction cup. Accurate from -20°/80°F and -30°/30°C. Safe temperature zone indicators. NSF listed.



3512
Instant Read Thermometer. 1" dial. Magnified lens. Accurate from 0°/220°F. Pocket case with clip. NSF listed.

TruTemp® Thermometers



3515
Instant Read Thermometer. Oversized 1 3/4" dial. Magnified lens. Accurate from 0°/220°F. Pocket case with clip. NSF listed.



3516
Digital Instant Read Thermometer. 0.3" LCD readout. Accurate from -40°/302°F. On/Off button. Pocket case with clip. Extra LR44 battery included. NSF listed.



3517
Instant Read Thermometer. High temperature range. 50°/550°F. 1" dial with magnified lens. Pocket case with clip. NSF listed.



3518N
TruTemp® Series Digital Cooking Thermometer. Stainless steel probe with 4 foot silicone cord. Temperature range 32°/392°F and 0°/200°C. C/F switch. Stand or use with magnet on back or for mounting to stove. Operates on 1AAA battery (included).



3519
Waterproof Digital Thermometer. Compact pen-style, large LCD readout. -40°/450°F and -40°/230°C. On/off and hold buttons. Auto shut off feature. LR44 battery included. NSF listed.



3522
Deep Fry Thermometer. Easy-to-read oversized 2" dial. Durable extra long 12" stainless steel stem with adjustable pan clip. Movable temperature indicator for easy reference. Instant read 50°/550°F and 50°/285°C. NSF listed.

Large Dial Thermometers and Clocks



161
Patio clock. Brushed silver metal bezel and silk screen graphics. Weather resistant construction and clock movement cover. 18" diameter. One AA battery required (not included).



166
Patio clock. Brushed silver metal bezel and silk screened graphics. Weather resistant construction and clock movement cover. 12" diameter. One AA battery required (not included).



497J
Humidigauge dial thermometer. All metal construction. Large, easy-to-read face. -60°/120°F and -50°/50°C scale. Includes relative humidity scale. 12" diameter.



681
Extra large thermometer. Bold, easy-to-read graphics with brushed silver metal bezel. -60°/120°F and -50°/50°C scale. Rustproof, weather resistant. 18" diameter.



6714
Indoor/Outdoor 13 1/2" Dial Thermometer. ColorTrak design features bright and colorful numbers. Range -60°/120°F and -50°/50°C. Framed in a glossy white bezel. Shatterproof and weather resistant.

Window/Wall Thermometers



1105J
Cold/Dry Storage Thermometer. Easy to read in poor lighting. 12" long. -0°/120°F and -30°/40°C. 2° divisions. Packed in an individual carton.



1106J
Cold/Dry Storage Thermometer. Easy to read in poor lighting. 12" long. -50°/70°F. 1° divisions. Packed in an individual carton.



5109
Jumbo Wall Thermometer. Bright red reading tube with extra large, colorful numbers. Range -40°/120°F and -40°/50°C. Weather resistant and rust-proof for quick, accurate temperature checks inside or outside.



5132N
Utility Wall Thermometer. White aluminum back with plastic endcaps. Range -40°/120°F and -40°/50°C.



5135N
Wall Thermometer. Large, easy-to-read face. Range -60°/120°F and -50°/50°C. Weather resistant aluminum construction.



5154
Wall Thermometer. Easy-to-read numerals in bright red and blue. Range -40°/120°F and -40°/50°C. Weather resistant and rustproof.



5153
Window thermometer. White, molded plastic with aluminum bracket. Weather resistant. -40°/120°F and -40°/50°C.



5316N
Window Thermometer. Large, easy-to-read numerals. Range -40°/120°F and -40°/50°C. Adjustable offset bracket for multi-directional viewing. Rustproof aluminum construction.



5321N
3 1/2" Dial Stick-On Window Thermometer. Read outside temperature from inside. Easy to apply suction cup mount. Range -40°/120°F. Weather resistant and rustproof.



5327
Indoor/Outdoor Thermometer. Read indoor and outdoor temperatures from inside. Bold numerals in bright blue and red. Range -40°/100°F and -40°/40°C.



5329
Indoor/Outdoor Thermometer. Dial to read indoor humidity. Large, easy-to-read face. Red indoor temperature, blue outdoor temperature. Range -40°/120°F and -40°/40°C.



5380N
1 3/4" Dial Stick-On Window Thermometer. Indoor/outdoor multipurpose thermometer easily mounts with double-faced adhesive. Range -40°/120°F and -40°/50°C. Weather resistant and rustproof.



5504
Indoor Humidiguide and Thermometer. Displays relative humidity and temperature. Temperature range 30°/110°F. Humidity range 10 to 80%. 4" square case hangs or stands.



5630
Big Read/Black on White 6" Dial Thermometer. Bold, easy-to-read numerals. Range -60°/120°F. Bracket for window mounting. Weatherproof and shatterproof materials.



5650
Round 8" diameter thermometer. Bold black and white graphics, easy-to-read numbers, white bezel, °F and °C scale.

Max/Min Thermometers



1441E
Digital Max/Min Thermometer. 20/120°F for 7 days at a time. Dual 3 meter probes for independent readings. 1 AAA battery included.



1442
Critical Care Thermometer for Monitoring Temperature Critical Materials. Temperature Range: -40 to 392°F or -40 to 200°C. Accuracy: 20 to 212°F +/- 1.8°F. Programmable high and low limit alarms. 96 hour memory of high and low temperatures. Records a history of alarm breaches including time and duration. Dual 6' glycol-tolerant probes. Password protected. 2 AAA batteries included.



1446
Wireless Refrigeration Thermometer with Remote Sensors. Temperature range -22 to 104°F or -30 to 40°C. Two remote sensors transmit reading to display unit. Visual and audible alarms based on user set min and max temperatures. Transmission range up to 65 feet from display unit. Audible and visual alarm with 15 minute delay. 2 AAA batteries for base unit and 4 AA batteries for sensors not included.



5458
Max/Min thermometer, magnet reset, registers high & low reading from last setting, -40/120°F, Permacolor™ filled.



5460
Max/Min Thermometer, push button reset and magnet reset, F°/C° Scales. 40°/120°F and -50°/40°C. Permacolor™ filled.



5565
Dial Hygrometer / Thermometer 20°/120°F; Humidity Range 5 to 90%.



5566
Digital Hygrometer -40°/160°F; Humidity Range 20-95%.

5566C
Digital Hygrometer/Thermometer -40°/70°C; Humidity Range 20-95%.

Maximum Registering Thermometers



21460-1J
Thermometer in Plastic Case, 0/220°F, Mercury filled.



21461-1J
Refill Tube, 0/220°F. For 21462-1.



21466-2J
Thermometer in Metal Open Face Armor Case, 100/300°F, Mercury filled.

Pocket Case Thermometers



21410-1J
Pocket Thermometer in Plastic Case, -30°/120°F, Mercury filled.



21412-1J
Pocket Thermometer in Plastic Case, -50°/120°F, Permacolor™ filled.



21418-1J
Pocket Thermometer in Plastic Case, 0°/220°F, Mercury filled.



21420-1J
Pocket Thermometer in Plastic Case, 0°/220°F, Permacolor™ filled.



21424-1J
Pocket Thermometer in Plastic Case, -15°/105°C, Permacolor™ filled.



21430-1J
Pocket Thermometer in Plastic Case, -35°/50°C, Mercury filled.



21432-1J
Pocket Thermometer in Plastic Case, -40°/50°C, Permacolor™ filled.



21438-1J
Pocket Thermometer in Plastic Case, -15°/105°C, Mercury filled.

Mechanical Timers



5830
5* Commercial Series Stainless Steel 60 Minute Timer. Rubberized knob and base, 9 second ring.



5831N
Classic Series 60 Minute Timer. Long ring.



5832
TruTimer™ Series 60 Minute Timer. Long ring.



90354
60 Minute Big & Bold Mechanical Timer. Easy to read 7.9" diameter face. Impact resistant and shatter-proof case.

Digital Timers



5896
Jumbo Readout Digital Timer. Extra large 2.5" x 1.6" display size. Times up to 99 minutes 59 seconds. Counts down or counts up; memory function to recall last time set; loud alarm. Magnet or stand positioning; LR44 battery included.



5806
Digital Timer. Minute/second timing. 0.7" readout. Times up to 99 minutes 59 seconds. Count up/countdown feature; water resistant. Clip/magnet/stand positioning. AAA battery included.



5816N
Professional Chef's Timer & Stopwatch. Easy-to-read and operate. 3/8" LCD readout shows minutes and seconds. Times up to 99 min 59 sec. 2 ft lanyard for easy handling. Recall feature remembers last display when alarm stops. LR44 battery included.



5822
Memory Digital Timer. Recalls last timing event for easy programming. Times up to 99 minutes 59 seconds. 0.8" LCD readout. Count up/countdown feature. Clip/magnet/stand positioning. 1 AAA battery included.



5827-21
Digital Timer. Minute/second timing up to 99 minutes 59 seconds. 0.75" LCD readout. Clip/magnet/stand positioning. 1 AAA battery included.



5828
Dual Event Digital Timer/Clock. Times two events simultaneously. Hour/minute timing up to 23 hours 59 minutes. 1.5" LCD readout. Clock feature. Clip/magnet/stand positioning. 1 AAA battery included.



5839
4 Event Digital Timer. Times 4 events simultaneously. Each timer counts up to 9 hours, 59 minutes and 59 seconds. 100 decibel alarms with a distinctive ring for each timer. Lights flash when timer reaches zero. Water resistant. Stand or wall mount. 4 AA batteries included.



NEW!

5842
Mini Timer Small and Sleek. 99 min, 59 sec timing. Counts Down with memory recall. 12hr/24 hour clock w alarm. Counts up/Counts Down. LR44 battery included.



NEW!

5846
Jumbo Readout Timer. Ultra Thin with Oversized 1.3" LCD readout. 99 min, 59 sec timing. Counts Down with memory recall. Clock Function. LR1130 lithium battery included.



NEW!

5849
Single View 4 Event Timer with Whiteboard plus Dry-erase Pen. Time up to 4 events simultaneously in a single view. Each event can time up to 23 hours, 59 minutes. Different tone for each event. Convenient whiteboard plus dry-erase pen with eraser for notes. Batteries included.



5862
Compact 4 Event Digital Timer. Times up to 4 events simultaneously. Extra large LCD readout. 4 distinct beep tones. Each timer times up to 99 hours 59 minutes 59 seconds. Count up/count down feature. 12/24 hour clock. Self standing/magnetic mounting feature. 2 LR44 batteries included.



NEW!

5863
Water & Impact Resistant Timer. Dust and Water resistant - IP65 rated. Impact resistant up to 8 feet. 4 Level adjustable volume. Times up to 23 hours, 59 minutes, 59 seconds. Counts up and counts down with memory recall. Backlight and clock features. Batteries included.

Electronic Portion Control Scales Stainless Steel Platform



Digital Portion Control Scale Stainless Steel 5"x5" Platform. Tare, On/Off button; Auto off and disable auto off functions. Low battery and overload indicators. Runs on AC adapter (included) or 9-volt battery (not included). NSF listed.

TE32C Capacity: 2lb. x 0.1oz/1kg x 1g.

TE10C Capacity: 10lb x 0.1oz/5kg x 1g.



Stainless Steel 7.5" x 4.625" Platform. Tare, On/Off button; Auto off and disable auto off functions. Low battery and overload indicators. Field recalibratable. Runs on AC adapter (included) or 9-volt battery (not included) NSF listed.

TE11 Capacity: 11lb. x 0.1oz/5kg x 1g

TE22 Capacity: 1-11lbs x 0.1oz; 11lb.-22lb. x 0.2oz/0-5kg x 2g; 5kg-10kg x 2kg.



TPC60LT

Legal for Trade Price Computing Scale. Capacity: 30 lb x 0.01lb / 30-60lb x 0.02lb / 0-15 kg x 0.005 kg /15-30 kg x 0.01kg. 10" x 14" stainless steel platform. Accuracy Class: III Legal for Trade. Dual front and back displays with large LCD readouts. Tactile key switches and tare, zero and clear keys. Multi-interval scale with keyboard tare; semi-automatic tare; programmable tare via PLU's. Price Look Up (PLU) keys, Units Key (lb/kg), Save Key (tare and unit price), and 12 Programmable (unit price and tare) speed PLU keys. RS232 communication (for remote printer) PC interface program to upload/download PLU data. Power cord included. Zebra model LP2824 ultra-compact direct thermal printer. 203 dpi resolution. 2" label width. Serial RS-232 communication port.

TPC60PRNWT

Zebra model LP2824 with 1 roll of LST-8010 printer labels



TE10R

10lb x 1/8oz. & 1/4oz./10lb x 0.1oz. x 0.2oz/5 kg. x 5 gm. Stainless steel platform. Runs on AC adapter or rechargeable battery (included). NSF listed.



TE10SSW

Waterproof Digital Portion Control Scale. 10 lb x 1/8 oz / 10 lb x 0.1oz / 5kg x 2g. 6.5" x 8" stainless steel platform. Plastic housing with stainless steel cover. IP67 protection. Large easy-to-read 1" LCD readout with backlight. Tare and High/Low Weigh features. Field recalibratable. Rechargeable battery and adaptor Included. Dimensions: 9.61" x 7.40" x 2.24". NSF listed.



TE10T

10lb Digital Portion Control Scale with Tower Readout. 10 lb x 0.005 lb / 160 oz. x 0.1 oz / 5 kg x 0.002 kg. 6.3" x 6.3" stainless steel platform. Large easy-to-read 1.5" LCD readout with backlight. Tare and Auto Off features. AC adaptor included or runs on 6 AAA batteries (not included). Dimensions: 6.7" x 6.7" x 2.5". NSF listed.



TE30WD

30lb Portion Control Digital Scale with Wireless Display. 30lb/15Kg Capacity. Graduation: 30lbs x 0.1oz; 15kg x 2g. Oversized 14"x14" Removable stainless steel platform. Wireless display head. Touch less tare feature. Power Supply - Platform: AC adaptor or 6AA batteries; Wireless display head and platform. 2 AC adaptors (included) or 6AA batteries (not included). NSF pending.



TE22OS

22lb Digital Scale with Large Platform. Large 14" x 10" Removable stainless steel platform. Capacity: 22lb/10kg. Graduation: 1/8oz-1/4oz-1/2oz. or 2g/5g/10g. Low profile design. Tare, Auto-off and low battery indicator features. AC adaptor (included) or 9-volt battery (not included). NSF pending.

Analog Portion Control Scale - Stainless Steel Chassis



All feature rugged stainless steel construction, angled dial designs, protective shatterproof lenses and removable platforms.



TS32F
32 oz. x 1/4 oz. - Fixed Dial.



TS32
32 oz. x 1/4 oz. - Rotating Dial.



TS32KL3
32 oz/1 kg. 32 oz x 1/4 oz/ 900 g x 5g.
Dual Scale w/ rotating dial.



TS5
5 lb/2.3 kg. Dual Scale
with rotating dial.



TS25KL
25 lb. x 2 oz 11 kg x 50 g. Dual Scale
with rotating dial.



TS50
50 lb. x 4 oz. - Scale with rotating dial.

Heavy Duty Mechanical Scales

Features corrosion-resistant weighing mechanisms, dual measurement, NSF food grade platform, internal stop mechanisms, and shatterproof lenses and bold dials.



Bakers Dough Scales
8 lb & 16 lb models. 9" diameter stainless steel platters. Baked enameled metal base. Stainless steel scoop included. Adjustable counter weight and poise.

TS8B
Capacity: 8lb. X 1/4 oz.

TS16B
Capacity: 16lb. X 1/4 oz.

TS8BW
Weight Set. 8lb.



THD32
32 oz x 1/8 oz with 9"x9" stainless steel platform.



THD32D
32 oz x 1/8 oz with 9"x9" stainless steel platform and internal stop mechanism with Dashpot.



THD50
50 lbs x 2 oz with 9"x9" stainless steel platform and internal stop mechanism.

Compact Analog Portion Control Scales

All feature antimicrobial housing, NSF food grade platforms, internal stop mechanisms and angled dials.



TP16FF

16oz x 1/4oz with fixed french fry/taco holder.



TP16

16oz x 1/4oz with stainless steel platform.



TP32

32oz x 1/4oz Ice Cream Scale with % of overrun.

Receiving Scales



TE150

Stainless steel platform. 150 lb x .2 lb/70 kg x .1 kg. 6' coiled cord and 1" LCD readout. Runs on adaptor (included) or 6 AA batteries (not included).



TE400

Steel tread plate platform. 400 lb x .5 lb/180 kg x .2 kg. 6' coiled cord and 1" LCD readout. Runs on adaptor (included) or 6 AA batteries (not included).



TR250SS

Heavy Duty Stainless Steel Mechanical Receiving Scale. 250 lb. x 1 lb. with press lock feature.

Hanging Scales



3070

Industrial hanging scale - Dual lb./kg. vertical scale with hanging hook. 70 lb./32. kg capacity. Item # 30704104.



3328

Industrial hanging scale - Dual lb./kg vertical scale with hanging hook. 280 lb./128 kg. capacity. Item # 33284104.



3470

Industrial hanging scale - Dual lb./kg. dial scale with hanging hook. Item # 34704104.



3305N

Steel Scoop - Optional accessory for Industrial and Utility Scales. Galvanized steel. Item # 33054104N.

Salter® for Foodservice



1020 BDBKSSDR

Aquatronic® Digital Scale. Measures either dry or liquid ingredients. Large 0.5" LCD readout. Removeable stainless steel platform on black base. Add & Weigh feature. Capacity: 11 lb X 1/8oz/5 kg x 1g/175 fl.oz x 1/7 fl.oz/5000 ml x 1ml. Lithium battery included.



1201BK

Unique, flexible design with a wireless removable readout. Easily accommodate any size bowl or plate as the readout is not fixed at all! Expanded 22 lb capacity measuring to the precise 0.1 oz. 1.0" display window with bright blue backlight. Electronic tare function. Converts from lb:oz to kg:gm. Stainless steel platform.



6055 SSDR

Digital Scale with removeable stainless steel platform. Add & Weigh feature. Auto & manual shut-off features. Capacity: 11 lb. X 1/8oz/5 kg x 1g. Lithium battery included.

Salter's scales not only cover the basics of measurement, but offer a range of added features such as measuring liquids, tracking nutritional values and enabling one scale to measure the addition of several ingredients in one bowl.



1250 USBKCRDR

Compact Digital Scale. Ultra fine 0.005oz/0.1 g increments. Weighing tray inverts for use as a cover. Capacity: 8oz. x 0.005 oz./250g x 0.1g. Lithium battery included.



3013BDSSEF

Aquatronic® Digital Scale. Stainless steel cover is hygienic and easy to clean. Weigh directly on the platform or weigh with own mixing bowl. Automatically adjusts for use with most bowls or containers. Aquatronic® liquid measurement. Includes Baker's Chart for conversion of volumes to weight. Capacity: 22lb x 1/8oz/10kg x 2g/350fl.oz x 1/8fl.oz/10 liters x 2ml. Dimensions: 9 x 2.38 x 9.38.

Hotel & Resort Products



1130T
Rotating Easy-To-Read 7" Speedometer Dial Scale
Capacity: 330lb
Personal color-coded Weight Tracker™ indicators. Solid steel construction with a ribbed easy-to-clean black mat.



7329
Lithium Digital Scale
Easy-to-read 1.0" LCD readout. Accurate to 330lb/150kg in 0.2lb/0.1kg increments
Easy-to-clean mat and platform. Lithium battery included.



7340B
Lithium Digital Scale
Easy-to-read 1.9" LCD readout. Accurate to 440lb/200kg in 0.2lb/0.1kg increments
Soft Step™ rubberized platform for stability and comfort
Oversized platform provides extra foot space. Lithium battery included.



200WHGYLKR
Fitness Center Extra Large Scale. Hard wearing vinyl mat is durable and easy to clean
Extra large dial for easy reading. Capacity: 400lbs/180kg in 1.0lb/0.5kg increments.



2004
Analog Scale Rotating easy-to-read dial. Capacity: 300lb/136kg. Solid steel construction with a ribbed white, black or silver mat.



4832B
Analog Scale Rotating easy-to-read 5" speedometer dial
Capacity: 300lb
Solid steel construction, black platform and gray bezel



7014B
Lithium Scale. Capacity: 330lb/150kg in 0.2lb/0.1kg increments. Stylish injection molded platform with silvertone bezel accent. Easy-to-read 1.0" LCD readout. 2 lithium batteries included.



7519
Glass Scale High Capacity up to 440lb/200 kg in 0.2lb/0.1kg increments. Extra large 1.9" AccuGlo™ blue backlit LCD readout. 10mm Rugged tempered glass platform. 2 AAA batteries included.



STP2050
Garment Butler
For Use in hotels, resorts and clubs. On/Off with Auto shut off Safety Feature. Timer Selection for a variety of fabrics. 4 models to choose from with the features you need. *Please contact customer service for information on additional models.*



8120-4
Luggage Scale. Compact design (weighs .48lb.)
High Capacity up to 88lb/0.2lb; 40kg/0.1kg. Easy to read 1.3" wide by 0.6" high LCD readout. Durable clasp and rugged nylon web strap. Lithium battery included. 8 pack tray.



8122-4
Digital Talking Luggage Scale. Easy-to-read 1.3" x 0.6" blue backlit LCD screen. Capacity up to 88lb/0.2lb; 40kg/0.1kg. Durable clasp and rugged nylon web strap material. Two handed soft grip handles. Weighs less than a pound. 2 lithium batteries included. 4 pack tray.

Accessories

5525NJ

Water Cistern for 5525.

51P432J1

Pan Clip for 1 3/4" and 2" BiTherm®

Replacement Parts for Model 9405/9400

9405RP	Replacement Probe for 9405
9405RH	Replacement Handle for 9405
9400RP	Replacement Handle and Probe for 9405
9405BC	Replacement Battery Cover for 9405/9400
9400BG	Replacement Battery Gasket for 9405

Miscellaneous Parts and Supplies

1470NRP	Replacement probe for model 1470N, 1478-21, 1471N
1471RP	Replacement probe for model 1471 (not for 1471N)
1479RP	Replacement probe for model 1479-21
97S41-1J	Wick for 1328 sling psychrometers
97S231-J1	Wick for 1330 sling psychrometers
97S35J	Wick for 5522, 5523 hygrometers
TEADPT1	120V adapter for models: TE10, TE22, TE32, TE150, TE400, TE21P
TEADPT2	220V adapter for models: TE10, TE22, TE32, TE150, TE400, TE21P
TEADPT3	120V adapter for models: TE10R, TE10SS, TE32R
TEADPT4	120V adapter for model: TE12
TEADPT5	120V adapter for model: TE32C
TEADPT6	120V adapter for model: TE10C
TEADPT7	Adaptor for EUROPE use only on models: TE10R, TE10ROS, TE32R
TEADPT10	120V adapter for model TE10T
TE12FS	Foot pedal switch for model: TE12
TERBAT	Replacement battery for TE10R/TE32R
TERBAT12	Replacement battery for TE12
TERPLAT1	Stainless steel 10" x 6.75" platform accessory for models: TE10R, TE10ROS, TE32R
TERGROM	Rubber grommet platform accessory for models: TE10R, TE10ROS, TE32R

Index

MODEL NO.	DESCRIPTION	PACK QUANTITY	PAGE
161	.Large Dial Wall Thermometer	.3	.18
166	.Large Dial Wall Thermometer	.5	.18
1020BDBKSSDR	.Digital Scale	.4	.26
1105J	.Wall/Cold Dry Storage Thermometer	.1	.19
1106J	.Wall/Cold Dry Storage Thermometer	.1	.19
1130T	.Bath Scale	.2	.27
1201BK	.Digital Scale	.4	.26
1250USBKCRDR	.Compact Digital Scale	.6	.26
1441E	.Max/Min Thermometer	.1	.20
1442	.Critical Care Ref/Freezer Thermometer	.1	.13, 20
1443	.Digital Thermometer	.3	.13
1446	.Wireless Ref/Freezer Thermometer	.1	.13, 20
1450USSVBKLQDR	.Dietary Computer Scale	.2	.26
1470N	.Digital Cooking Thermometer	.6	.10
1470NRP	.Replacement Probe for 1470N	.N/A	.10, 28
1471N	.Digital Cooking Thermometer	.6	.10
1471RP	.Replacement Probe for 1471	.N/A	.10, 28
1478-21	.Digital Thermometer and Timer	.3	.10
1479-21	.Wireless Thermometer w/Remote & Timer	.3	.10
1479RP	.Replacement Probe for 1479-21	.N/A	.10, 28
200WHGYCKR	.Bath Scale	.2	.27
2004	.Bath Scale	.4	.27
21410-1J	.Pocket Case Thermometer	.1	.21
21412-1J	.Delrin® Plastic Pocket Thermometer	.1	.16,21
21418-1J	.Pocket Case Thermometer	.1	.21
21420-1J	.Delrin® Plastic Pocket Thermometer	.1	.16, 21
21424-1J	.Pocket Case Thermometer	.1	.21
21430-1J	.Pocket Case Thermometer	.1	.21
21432-1J	.Pocket Case Thermometer	.1	.21
21438-1J	.Pocket Case Thermometer	.1	.21
21460-1J	.Maximum Registering Thermometer	.1	.20
21461-1J	.Refill Tube 0/200°F	.1	.20
21462-1J	.Dishwasher Test Thermometer.	.1	.16
21466-2J	.Metal Thermometer Case	.1	.20
3013BDSSEF	.Digital Kitchen Scale	.4	.26
3070	.Industrial Hanging Scale	.4	.25
3328	.Industrial Hanging Scale	.4	.25
3470	.Industrial Hanging Scale	.4	.25
3305N	.Steel Scoop	.4	.25
3503	.Refrigerator/Freezer Thermometer	.4	.13, 17
3504	.Meat Dial Thermometer	.6	.9, 17
3505	.Candy Deep Fry Thermometer	.6	.11, 17
3506	.Oven Dial Thermometer	.6	.12, 17
3507	.Refrigerator/Freezer Thermometer	.6	.13,17
3509	.Refrigerator/Freezer Thermometer	.6	.13, 17
3512	.0/220°F Instant Read Thermometer	.6	.17
3515	.0/220°F Instant Read Thermometer	.6	.18
3516	.Digital Instant Read Thermometer	.6	.8, 18
3517	.50/550°F Instant Read Thermometer	.6	.18
3518N	.Digital Cooking Thermometer	.3	.10, 18
3519	.Waterproof Digital Thermometer	.3	.8, 18
3522	.Deep Fry Thermometer	.6	.10, 18
3621N	.Instant Read Thermometer with Holder	.6	.3, 14
497J	.Humidiguide Dial Thermometer	.5	.18
4832B	.Bath Scale	.2	.27
519	.Digital Candy/Deep Fry Thermometer	.6	.11
51P4321J1	.Pan Clip	.1	.28
5109	.Jumbo Wall Thermometer	.6	.19
5132N	.Window/Wall Thermometer	.6	.19
5135N	.Utility Thermometer	.6	.19
5153	.Window Thermometer	.6	.19
5154	.Indoor/Outdoor Wall Thermometer	.6	.19
5316N	.Indoor/Outdoor Wall Thermometer	.6	.19
5321N	.Indoor/Outdoor Wall Thermometer	.6	.19
5327	.Indoor/Outdoor Wall Thermometer	.6	.19
5329	.Indoor/Outdoor Wall Thermometer	.4	.19
5380N	.Window/Wall Dial Thermometer	.12	.19
5408J	.Special Use Thermometer	.N/A	.16
5408A	.Special Use Thermometer	.N/A	.16

5410J	Special Use Thermometer	N/A	16
5416J	Special Use Thermometer	N/A	16
5458	Max/Min Thermometer	4	20
5459	Max/Min Thermometer	4	20
5460	Max/Min Thermometer	4	20
5499J	Max/Min Thermometer	6	20
5504	Dial Thermometer/Hygrometer	6	19
5565	Dial Hygrometer/Therm	6	20
5566	Digital Hygrometer	6	20
5566C	Digital Hygrometer/Therm	6	20
5630	Big Read/Black on White Thermometer	6	19
5650	Big Read/Black on White Thermometer	6	19
5806	Digital Timer	6	22
5816N	Chef's Timer	6	22
5822	Digital Timer	6	22
5827-21	Digital Timer	6	22
5828	Two Event Digital Timer	6	22
5829	10 Key Digital Timer	6	22
5830	Stainless Steel Mechanical Timer	6	22
5831N	Mechanical Timer	6	22
5832	Mechanical Timer	6	22
5839	4 Event Digital Timer	2	22
5842	Mini Digital Timer	NA	22
5846	Digital Timer	NA	22
5849	4 Event Digital Timer	NA	22
5851	Stainless Steel Timer with Clock	2	22
5862	4 Event Timer	6	22
5863	Waterproof Digital Timer Pack	NA	22
5896	Digital Timer with Jumbo Readout	6	22
5909J	Candy/Deep-Fry Thermometer	1	11
5911N	Candy/Deep-Fry Thermometer	6	11
5921N	Oven/Grill Thermometer	6	12
5924	Refrigerator/Freezer Thermometer	6	13
5925N	Refrigerator/Freezer Thermometer	6	13
5925	Refrigerator/Freezer Thermometer	6	13
5926	Refrigerator/Freezer Thermometer	.50	13
5927	Glycol Refrigerator/Freezer Thermometer	.50	13
5932	Oven Thermometer	6	12
5937N	Roast/Yeast Thermometer	6	9
5939N	Dial Meat Thermometer	6	9
5947	Dial Oven/Meat Thermometer	6	9
5948N	Tobacco Thermometer	12	16
5976N	Soil Thermometer	6	16
5977N	Refrigerator/Freezer Thermometer	6	13
5978N	Candy/Deep Fry Thermometer	6	11
5980N	Hot-Holding Thermometer	6	14
5981N	Cold-Holding Thermometer	6	13, 14
5982N	Milk/Beverage Thermometer	12	13
5983N	Candy/Deep-Fry Thermometer	6	11
5984J	Instant Read/Oven Thermometer	6	9, 12
5985N	Hot Beverage Thermometer	4	16
5988J	1" Dial Standard Grade Thermometer	6	3
5989N,44	Instant Read T/R with Holder	6	3
5990N	Professional Meat Thermometer	6	9
5992N	Candy/Deep-Fry Thermometer	6	11
5995N	Oven Thermometer	6	12
5996N	Refrigerator/Freezer Thermometer	6	13
5997E	Cappuccino Frothing Thermometer	4	16
6021	Grill Thermometer	6	12
6055 SDDR	Digital Scale	4	26
6071J	1" Dial Superior Grade Thermometer	1	3
6072N	1" Dial Superior Grade Thermometer	1	3
6073J	1" Dial Superior Grade Thermometer	1	3
6075N	1" Dial Superior Grade Thermometer	1	3
6076J	1" Dial Superior Grade Thermometer	1	3
6079J	1" Dial Superior Grade Thermometer	1	3
6081J8	Roast/Meat Thermometer	1	9
6084J8	Candy/Deep-Fry Thermometer	1	11
6084J12	Candy/Deep-Fry Thermometer	1	11
6087J12	Professional Kettle Thermometer	1	10
6091N	1" Dial Standard Grade Thermometer	1	3

6092N 1" Dial Standard Grade Thermometer 1 3
6093N 1" Dial Standard Grade Thermometer 1 3
6094N 1" Dial Standard Grade Thermometer 1 3
6095N 1" Dial Standard Grade Thermometer 1 3
6096N 1" Dial Standard Grade Thermometer 1 3
6099N 1" Dial Standard Grade Thermometer 1 3
61054J Roast/Meat Thermometer 1 9
6129J10 Refrigerator Showcase Thermometer 1 13
6211J 2" Bi-Therm® Thermometer 1 4
6212J 2" Bi-Therm® Thermometer 1 4
6213J 2" Bi-Therm® Thermometer 1 4
6215J 2" Bi-Therm® Thermometer 1 4
6220J 2" Bi-Therm® Thermometer 1 4
6235J 2" Bi-Therm® Thermometer 1 4
6246J CharBroiler Thermometer 1 12
6714 13 1/2" Color Trak Wall Thermometer 4 18
681 Extra Large Wall Thermometer 3 18
7014B Bath Scale 2 27
7329 Bath Scale 2 27
7340B Bath Scale 2 27
7519 Bath Scale 2 27
814 Grill/Smoker Thermometer 6 12
8018N 1 3/4" Standard Grade Thermometer 6 14
8120-4 Luggage Scale 8 27
8212J 1 3/4" Standard Grade Thermometer 1 4
8215N 1 3/4" Standard Grade Thermometer 1 4, 16
8220J 1 3/4" Standard Grade Thermometer 1 4
8122-4 Digital Luggage Scale 4 27
8238J 1 3/4" Standard Grade Thermometer 1 4
8750 180° Adhesive Dishwasher Test Labels 24 14,16
8751 160° Adhesive Dishwasher Test Labels 24 14,16
8766 160° Dishwasher Temp Test Strips 25 14,16
8767 180° Dishwasher Temp Test Strips 25 14,16
8768 140° Dishwasher Temp Test Strips 25 14,16
8769 160°/170°/180° Dishwasher Temp Test Strips 24 14,16
9000 DocuTemp Series Temp Monitoring System 1 14
9200 Thermocouple 1 5
9201 Thermocouple with probe 1 5
9305 Infrared Thermometer 1 7
9306 Infrared Thermometer 1 5, 7, 14
9400BG Replacement Battery Gasket for 9405 1 28
9400RP Replacement Handle & Probe for 9400 1 28
9405 Hand Held Digital Thermometer 1 5, 14
9405BC Replacement Battery Cover for 9405 1 28
9405RP Replacement Probe for 9405 1 6, 28
9405RH Replacement Handle for 9405 1 28
9517L Infrared Laser Thermometer 1 7, 14
9521 Infrared Thermometer 1 7
9522 Infrared Thermometer 1 5, 7
9523 Infrared Thermometer 1 7, 14
9801 Replacement Probe 1 6
9803 Probe for Thermocouple 1 6
9806 Clip-On Oven Probe 4' Lead 1 6
9810 Hand Held Thermometer 1 5
9810-1 1/8" Tip Hamburger Probe 1 6
9810-2 3/16" Tip Hamburger Probe 1 6
9810-17 Hand Held Thermometer & Probe 1 5,14
9810-18 Hand Held Thermometer & Probe 1 5,14
9812 Angle Surface Probe 1 6
9815A Data Logger 1 5,15
9817 Step-Down Probe 1 6
9818 Step-Down Probe 1 6
9826 Micro Needle Probe 1 6
9828 ThermoCheck Temp Recording System 1 5
9829 TempTaker Recording Data Logger 1 4, 15
9836 Adjustable Head Digital Thermometer 6 8
9839-15 Adjustable Head Digital Candy Thermometer 6 11
9840RB Pocket Digital Thermometer 6 8
9841RB Pocket Digital Thermometer 6 8
9842FDA Waterproof Digital Thermometer 6 8, 15
9847FDA Waterproof Digital Thermometer 6 8, 15

9848EFDA	Waterproof Digital Thermometer	6	8, 15
9867FDA	Hand Held Digital Thermometer	2	5, 15
9878E	Pocket Digital Thermometer	3	8, 15
9940N	Panel Mount Thermometer	6	17
9997C	Safe-T-Guard Sanitizing System	6	15
9998C	Safe-T-Guard Sanitizing System	6	15
9999N	Probe Wipes	10	15
STP2050	Trouser Press	1	27
TEADPT1	120V Replacement Adapter	1	28
TEADPT2	220V Replacement Adapter	1	28
TEADPT3	120V Replacement Adapter	1	28
TEADPT4	120V Replacement Adapter	1	28
TEADPT5	120V Replacement Adapter	1	28
TEADPT6	120V Replacement Adapter	1	28
TEADPT7	Replacement Rechargeable Battery	1	28
TEADPT10	120V Replacement Adapter	1	28
TE10R	Electronic PC Scale - 10 Lb.	4	23
TE10ROS	Electronic PC Scale - 10 Lb.	4	23
TE10C	Compact Electronic PC Scale - 10 Lb.	4	23
TE10SSW	Waterproof Digital PC Scale - 10 Lb.	4	23
TE10T	Electronic PC Scale - 10 Lb.	4	23
TE11	Electronic PC Scale - 11 Lb.	4	23
TE12FS	Foot Switch for TE12	1	28
TE11	Electronic PC Scale - 11 Lb.	4	23
TE22	Electronic PC Scale - 22 Lb.	4	23
TE22OS	Digital Scale 22lbs.	NA	23
TE30WD	Digital Scale, Wireless	NA	23
TE32C	Compact Electronic PC Scale - 32 Oz.	4	23
TE150	Receiving Scale - 150 Lb.	4	25
TE400	Receiving Scale - 400 Lb.	4	25
TERBAT	Replacement Rechargeable Battery	1	28
TERBAT12	Replacement Rechargeable Battery	1	28
TERGROM	Grommet Platform Accessory.	4	28
TERPLAT1	Scale Platform Accessory.	1	28
THD32	Heavy Duty Scale - 32 Oz.	1	24
THD32D	Heavy Duty Scale - 32 Oz.	1	24
THD50	Heavy Duty Scale - 50 Lb.	1	24
TP16	Compact Analog PC Scale - 16 Oz.	4	25
TP16FF	Compact Analog PC Scale - 16 Oz.	4	25
TP32	Compact Analog PC Scale - 32 Oz.	4	25
TPC60LT	Legal for Trade Price Computing Scale	2	23
TPC60PRNWT	Label Printer for TPC60LT		23
TR250SS	Receiving Scale	1	25
TS5	Analog PC Scale - 5 Lb.	4	24
TS25KL	Analog PC Scale - 25 Lb.	4	24
TS32	Analog PC Scale - 32 Oz.	4	24
TS32KL3	Analog PC Scale - 32 Oz.	4	24
TS32F	Analog PC Scale - 32 Oz.	4	24
TS50	Analog PC Scale - 50 Lb.	4	24
TS8B	Baker's Scale - 8 Lb.	1	24
TS16B	Baker's Scale - 16 Lb.	1	24
TS8BW	.8 LB Baker's Scale Weight Accessory	1	24

Terms & Conditions

1. Pricing - Please contact your sales representative for pricing.
2. Minimum Order - Product orders under \$200 net will be charged a \$30 processing fee per order.
3. Freight - All product is shipped FOB Riverside, CA. Routing at factory discretion.
4. Terms - Net 30 days. Interest of 1 1/2% per month will be assessed on outstanding balances past agreed account terms.
5. Standard Packaging - Product must be ordered in minimum quantities of shelf packs only.
6. Lead Time - Taylor requires a minimum of 10 working days to ship orders from the day the order is received via phone, mail, fax or EDI at Customer Service.
7. Back Orders - Back orders will be shipped as soon as possible after prior authorization from customer.
8. Returns - A "Returned Goods Authorization" (RGA) must be obtained from Taylor before a return for any reason will be accepted. Shipments without an RGA will be refused. Contact Customer Service for an RGA.
9. EDI - Taylor is fully prepared to receive your orders via EDI. For information about Taylor's EDI capabilities, please contact Customer Service.
10. Claims - Taylor is not responsible for damage, loss or pilferage in transit. Goods are carefully packed to prevent damage. If damage or loss is found on receipt of goods, notify carrier AT ONCE to request an inspection. Customer bears the responsibility for filing carrier claims.

Due to continuous product improvements, pictures in catalog may differ slightly from the actual product.





All orders and customer service inquiries please contact:

Customer Service:

Taylor Precision Products
Las Cruces, NM 88001
Phone: 575-526-0944
Toll Free: 800-225-4834
Fax Orders: 575-526-4347
CustomerOrders@taylorusa.com

All Returns go to:

Taylor Precision Products
2220 Entrada del Sol, Suite A
Las Cruces, NM 88001

Corporate Headquarters:

Taylor Precision Products
2311 W. 22nd Street, Suite 200
Oak Brook, IL 60523
Phone: 630-954-1250
Fax: 630-954-1275
www.taylorusa.com