

S-Series Dunnage Racks

Solid Top

Models DRS30, DRS36, DRS48, DRS60

Slotted Top

Models DRS300, DRS360, DRS480, DRS600

Features & Benefits



- Conveniently and safely store heavy bulk foods, liquids, dairy products, dry goods, paper products, or clean equipment 12" (30 cm) off the floor.
- Storage height is double the required 6" (15 cm) enforced by most regional food safety and/or HACCP programs.
- Use in receiving dock area to keep clean food storage boxes safely off the ground while transferring bulk produce and other food products out of cartons and into storage boxes.
- New Speckled Gray (480) color matches perfectly with Camshelving™ for a clean, consistent look from the freezer to the cooler to dry storage area.
- Load capacity:
 - Models DRS30, DRS36, DRS300, DRS360 - 1500 lbs. (680 kg.)
 - Models DRS48, DRS60, DRS480, DRS600 - 3000 lbs. (1,360 kg.)
- One piece, seamless, heavy-duty polypropylene ensures long lasting durability and superior equipment performance. Single wall structure provides added strength and stability.
- Smooth surface is easy to clean and will not rust, chip, dent or corrode. Open ends and sides provide easy access for cleaning floor areas underneath.
- Available with solid ribbed tops or slotted tops.
- Slotted tops recommended for use in coolers and freezers to ensure extra cold air circulation around perishable products for optimum freshness and quality.
- One Camlink® connector is included to securely lock racks together for a more stable storage system.
- No assembly required.
- Available in 2 colors.

Item No. _____


Specifier Identification No. _____

Model No. _____

Quantity _____



S-Series Solid Top Dunnage Racks

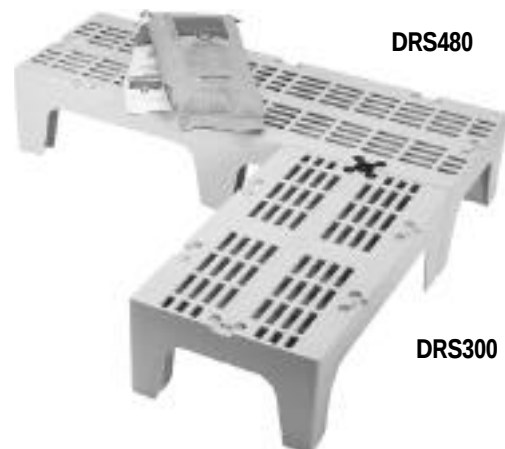

S-Series Slotted Top Dunnage Racks



Camlink®
Securely connects S-Series
Dunnage Racks together.

Approvals



S-Series Dunnage Racks

Solid Top

Models DRS30, DRS36, DRS48, DRS60

Slotted Top


Models DRS300, DRS360, DRS480, DRS600

Item No. _____

Specifier Identification No. _____

Model No. _____

Quantity _____

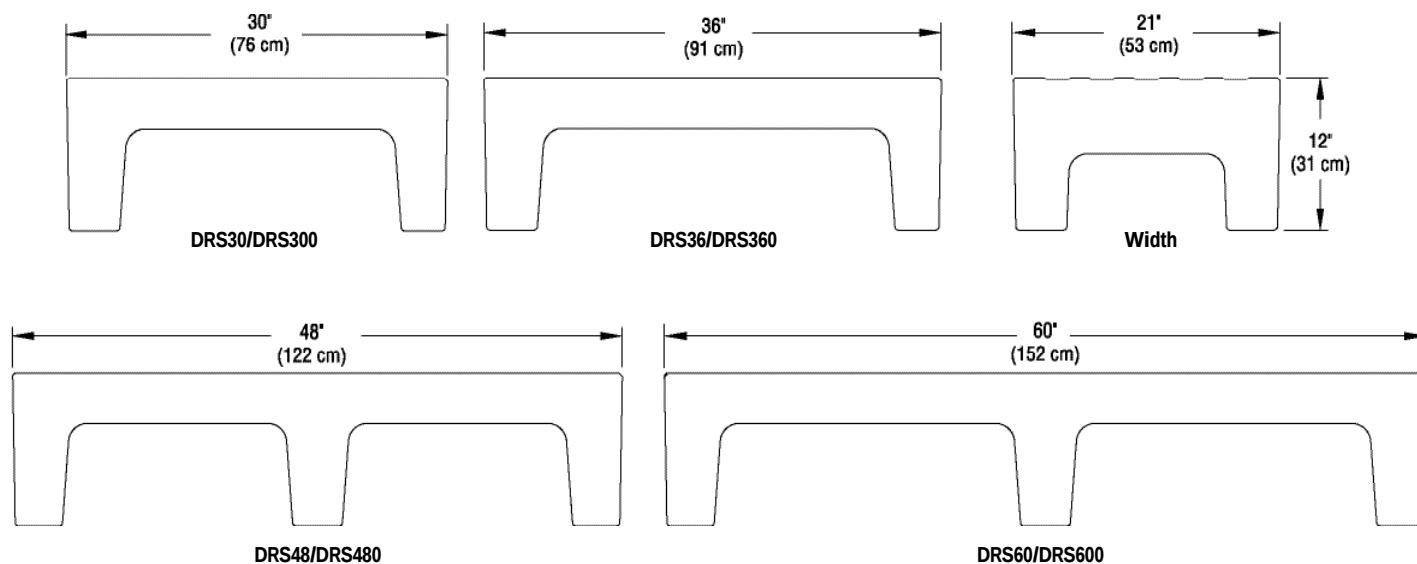

Specifications

Dimension Tolerance: +/- 1/4" (0,64 cm)

Code	Load Capacity	Dimensions L x W x H	Case lbs./cube Kg/m ³
Solid Top			
DRS30	1500 lbs. (680 Kg.)	30" x 21" x 12" (76 x 53 x 31 cm)	19 (4.78) 9 (0,13)
DRS36	1500 lbs. (680 Kg.)	36" x 21" x 12" (91 x 53 x 31 cm)	21 (5.72) 9,5 (0,16)
DRS48	3000 lbs. (1,360 Kg.)	48" x 21" x 12" (122 x 53 x 31 cm)	28 (7.77) 13 (0,22)
DRS60	3000 lbs. (1,360 Kg.)	60" x 21" x 12" (152 x 53 x 31 cm)	35 (9.72) 16 (0,27)

Code	Load Capacity	Dimensions L x W x H	Case lbs./cube Kg/m ³
Slotted Top			
DRS300	1500 lbs. (680 Kg.)	30" x 21" x 12" (76 x 53 x 31 cm)	19 (4.78) 9 (0,13)
DRS360	1500 lbs. (680 Kg.)	36" x 21" x 12" (91 x 53 x 31 cm)	20 (5.72) 9 (0,16)
DRS480	3000 lbs. (1,360 Kg.)	48" x 21" x 12" (122 x 53 x 31 cm)	26.5 (7.77) 12 (0,22)
DRS600	3000 lbs. (1,360 Kg.)	60" x 21" x 12" (152 x 53 x 31 cm)	34 (9.72) 15,5 (0,27)

Optional Accessories

Camlink® Connector ☐ DRLNK Black (110)
(1 included with each S-Series Dunnage Rack)

Standard Colors

☐ Dark Brown (131) ☐ Speckled Gray (480)

Architect Specs

The S-Series Dunnage Racks shall be Cambro Models..., manufactured by Cambro Mfg. Co., Huntington Beach, CA 92648 U.S.A. Each unit shall be constructed of one-piece, seamless, heavy-duty molded polypropylene and shall be available with solid ribbed tops or slotted tops. Unit load capacity shall range from 1500 - 3000 lbs. (680 -1,360 Kg.). The top of each unit shall be 12" (30 cm) from the floor. Units will not rust or corrode. Each unit shall come with one Camlink® connector to securely lock racks together. It shall require no assembly and shall be available in 2 colors.

Approvals



© 2002 Cambro Manufacturing Company 5801 Skylab Road, Huntington Beach, California 92647-2056-U.S.A.
 Telephone (1)714 848 1555 Toll Free 800 854 7631 Customer Service Hot Line 800 833 3003
 Printed in USA